



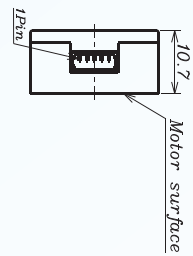

# Electromagnetic Encoder AM-EN22-S BL Series

ASSUN MOTOR

2015 edition. Specifications are subject to change without notice.



## PARAMETERS


PARAMETERS/MODELS	AM-EN22-S0032-003	AM-EN22-S0064-003	AM-EN22-S0128-003	AM-EN22-S0256-003	AM-EN22-S0512-003	AM-EN22-S1024-003
PPR/TURN	32	64	128	256	512	1024
MAX CHANNELS	3	3	3	3	3	3
MAX WORKING FREQ. (KHz)	20	40	100	180	360	512
DRIVE (Differential Output)	NO	NO	NO	NO	NO	NO

## INFORMATION

<p>TECHNICAL PARAMETERS</p> <table border="1"> <tr> <td>POWER <math>V_{CC}</math></td> <td>5V±5%</td> </tr> <tr> <td><math>V_{CC}</math> =5.0V SIGNAL</td> <td>TTL COMPATIBLE</td> </tr> <tr> <td>OPERATING TEMPERATURE</td> <td>-25~80°C</td> </tr> <tr> <td>INERTIA (Max)</td> <td>0.015g.cm<sup>2</sup></td> </tr> <tr> <td>OUTPUT CURRENT, each channel</td> <td>1.5mA(max)</td> </tr> </table>	POWER $V_{CC}$	5V±5%	$V_{CC}$ =5.0V SIGNAL	TTL COMPATIBLE	OPERATING TEMPERATURE	-25~80°C	INERTIA (Max)	0.015g.cm <sup>2</sup>	OUTPUT CURRENT, each channel	1.5mA(max)	<p>CONNECTOR: 53048-0510 (Molex)</p>	<p>CONNECTION DIAGRAM</p>
POWER $V_{CC}$	5V±5%											
$V_{CC}$ =5.0V SIGNAL	TTL COMPATIBLE											
OPERATING TEMPERATURE	-25~80°C											
INERTIA (Max)	0.015g.cm <sup>2</sup>											
OUTPUT CURRENT, each channel	1.5mA(max)											

## RECOMMENDED COMBINATION

### AM-EN16-S\*\*\*\* COMBINATION SCHEME

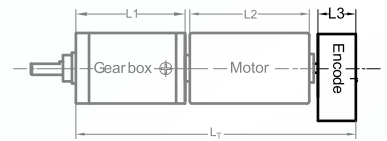

TOTAL LENGTH (GEARBOX AND MOTOR): $L_T = L_1 + L_2 + L_3$ (=10.7mm)				
L1:36P	L1:45P	L2:BL36	L1:45P	L2:BL20
34.1	38.6	60.0	38.6	100.0
42.7	49.4		49.4	
51.3	60.2		60.2	
59.9	71.0		71.0	

Recommend Gearbox:  
Planetary Gearbox:  
AM-36P  
AM-45P

Recommend Motor:  
BRUSHLESS Motor:  
AM-BL36\*\*\*A/B  
AM-BL45\*\*\*A/B

For more motor and gearbox specs, see Assun Motor website.

Please tell us if there is vibration in application. Clients should pay attention to the integrity and reliability of the transmitted signal.

## REMARKS

Clients can choose gearbox and encoder to match with this motor. Some combinations are listed here for reference.

Motor Data Tested at 25°. Motor Operation exceeds continuous limits of operating range will compromise the life of the device.